
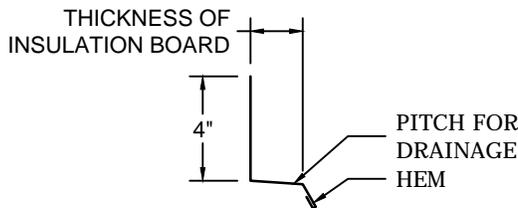


PAREX USA STUCCO ASSEMBLIES

STEP 8: INSTALLING WINDOW



AFTER THE STRIPS OF WATER-RESISTIVE BARRIER SHEET HAVE BEEN INSTALLED AT THE STILL AND JAMBS AS SHOWN, THE WINDOW CAN BE INSTALLED.

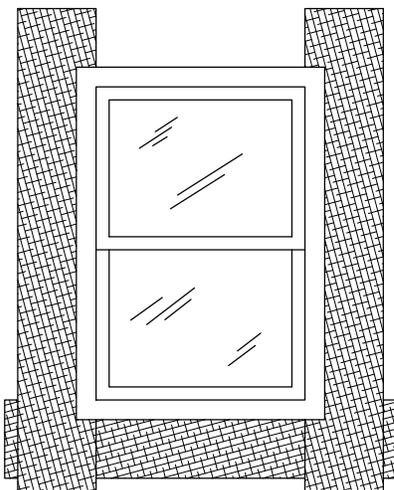

(PROFILE)

STEP 9: METAL FLASHING PROFILE

FLASHING SHOULD BE FABRICATED IN THE PROFILE SHOWN. LENGTH OF FLASHING IS 1" LONGER THAN THE WIDTH OF THE WINDOW FRAME. END DAMS SHOULD BE TURNED UPWARD 5/8" AS SHOWN.

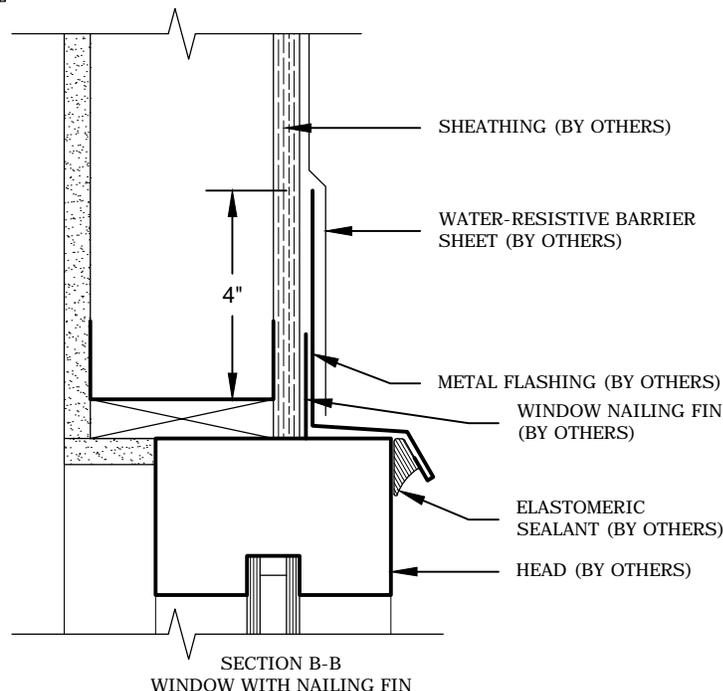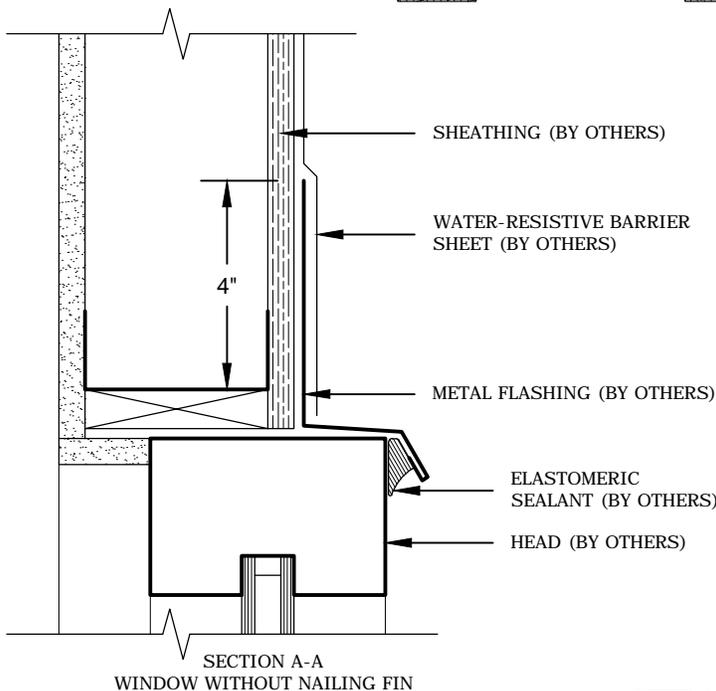

STEP 10: INSTALLATION OF METAL HEAD FLASHING

LENGTH OF THE FLASHING IS DEPENDENT ON THE TYPE OF WINDOW USED. SECTION A-A & B-B ILLUSTRATE TWO TYPES OF WINDOWS. FLASHING SHOULD BE INSTALLED AS ILLUSTRATED. FOR ANY UNUSUAL CONSTRUCTION PLEASE CONTACT PAREX USA TECHNICAL SERVICES.

G1.12C ROUGH WINDOW OPENING

PAREX ARMOURWALL 100 & 300, LAHABRA FASTWALL 100 & 300, ELREY FASTWALL & FIBER-47, TEIFS ONE COAT & SCRATCH & BROWN

□ HE □ KRAK-SHIELD □ WATERMASTER

NOTE:

1. Stucco claddings and any cladding using a mortar bed require the use of a slipsheet installed over the Water-Resistive & Air Barrier Coating to prevent adhesion to the stucco.
2. Refer to Parex USA specifications specified basecoat products and thickness.

Disclaimer: The design specifications and construction shall comply with all local building codes and standards. Parex USA installation guidelines are for general information and guidance only and Parex USA specifically disclaims any liability for the use of this design, and for design engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Parex USA are shown for clarity of the Parex USA product only. Contact the Manufacturer for installation instructions. Technical Support: 1-800-226-2424 www.parexusa.com